


R6MX Té renversé orientable

Triple-Lok® cône 37° / Triple-Lok® femelle tournant 37°
SAE 070432

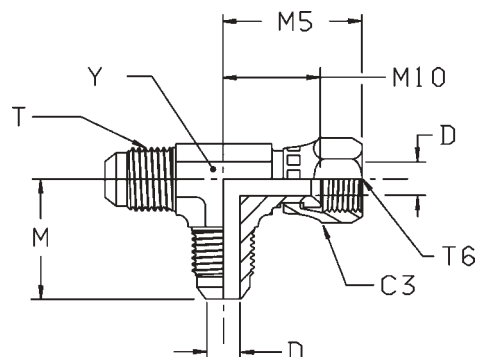

Ø ext. du tube		Filetage UN/UNF-2A T	Filetage UN/UNF-2B T6	C3	D	M	M5	M10	Y	Poids (Acier) gr./pièce	Triple-Lok® Acier	Triple-Lok® Acier inox	PN (bar)	
mm	in.			mm	mm	mm	mm	mm	mm				S	SS
6	1/4	7/16-20	7/16-20	16	4	23	25	17	11	44	4R6MXS	4 R6X-SS	500	350
8	5/16	1/2-20	1/2-20	17	6	24	27	17	13	56	5R6MXS	5 R6X-SS	420	350
10	3/8	9/16-18	9/16-18	19	8	27	32	22	14	69	6R6MXS	6 R6X-SS	350	350
12	1/2	3/4-16	3/4-16	22	10	32	35	24	19	136	8R6MXS	8 R6X-SS	350	350
14, 15, 16	5/8	7/8-14	7/8-14	27	12	37	41	28	22	207	10R6MXS	10 R6X-SS	350	350
18, 20	3/4	1 1/16-12	1 1/16-12	32	16	42	44	30	27	319	12R6MXS	12 R6X-SS	350	350
22	7/8	1 3/16-12	1 3/16-12	35	18	46	45	34	33	622	14 R6X-S	14 R6X-SS	250	250
25	1	1 5/16-12	1 5/16-12	38	22	46	51	36	33	489	16R6MXS	16 R6X-SS	250	250
28, 30, 32	1 1/4	1 5/8-12	1 5/8-12	50	28	52	59	43	41	712	20R6MXS	20 R6X-SS	250	210
35, 38	1 1/2	1 7/8-12	1 7/8-12	57	33	59	66	47	48	1100	24 R6X-S	24 R6X-SS	170	170

Les produits sont conformes à notre gamme standard de livraison.
Les versions métriques et pouces peuvent avoir des 6 pans de dimension différente.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Les pressions nominales (PN) peuvent différer selon la matière: acier (S) et inox (SS).

