


## F3MX Union mâle BSPT

Triple-Lok® cône 37° / Filetage mâle BSPT (ISO 7)

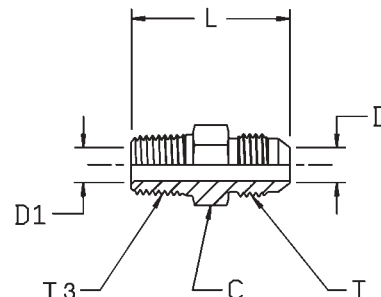

| Ø ext.<br>du tube |       | Filetage<br>BSPT<br>T3 | Filetage<br>UN/UNF-2A<br>T | C<br>mm | D<br>mm | D1<br>mm | L<br>mm | Poids<br>(Acier)<br>gr./pièce | Triple-Lok®<br>Acier | Triple-Lok®<br>Acier inox | PN (bar) |     |
|-------------------|-------|------------------------|----------------------------|---------|---------|----------|---------|-------------------------------|----------------------|---------------------------|----------|-----|
| mm                | in.   |                        |                            |         |         |          |         |                               |                      |                           | S        | SS  |
| 6                 | 1/4   | 1/8-28                 | 7/16-20                    | 13      | 4       | 4        | 31      | 13                            | <b>4F3MXS</b>        | <b>4F3MXSS</b>            | 315      | 315 |
| 6                 | 1/4   | 1/4-19                 | 7/16-20                    | 14      | 4       | 4        | 36      | 25                            | <b>4-4F3MXS</b>      | <b>4-4F3MXSS</b>          | 315      | 315 |
| 8                 | 5/16  | 1/8-28                 | 1/2-20                     | 14      | 6       | 5        | 31      | 17                            | <b>5F3MXS</b>        | <b>5F3MXSS</b>            | 315      | 315 |
| 8                 | 5/16  | 1/4-19                 | 1/2-20                     | 14      | 6       | 6        | 36      | 24                            | <b>5-4F3MXS</b>      | <b>5-4F3MXSS</b>          | 315      | 315 |
| 10                | 3/8   | 1/4-19                 | 9/16-18                    | 16      | 8       | 8        | 36      | 25                            | <b>6F3MXS</b>        | <b>6F3MXSS</b>            | 315      | 315 |
| 10                | 3/8   | 3/8-19                 | 9/16-18                    | 19      | 8       | 8        | 36      | 37                            | <b>6-6F3MXS</b>      | <b>6-6F3MXSS</b>          | 315      | 315 |
| 10                | 3/8   | 1/2-14                 | 9/16-18                    | 22      | 8       | 8        | 43      | 45                            | <b>6-8F3MXS</b>      | <b>6-8F3MXSS</b>          | 315      | 315 |
| 12                | 1/2   | 3/8-19                 | 3/4-16                     | 19      | 10      | 10       | 39      | 43                            | <b>8F3MXS</b>        | <b>8F3MXSS</b>            | 315      | 315 |
| 12                | 1/2   | 1/4-19                 | 3/4-16                     | 19      | 10      | 7        | 39      | 41                            | <b>8-4F3MXS</b>      | <b>8-4F3MXSS</b>          | 315      | 315 |
| 12                | 1/2   | 1/2-14                 | 3/4-16                     | 22      | 10      | 10       | 46      | 71                            | <b>8-8F3MXS</b>      | <b>8-8F3MXSS</b>          | 315      | 315 |
| 14, 15, 16        | 5/8   | 1/2-14                 | 7/8-14                     | 24      | 12      | 12       | 48      | 74                            | <b>10F3MXS</b>       | <b>10F3MXSS</b>           | 315      | 315 |
| 14, 15, 16        | 5/8   | 3/8-19                 | 7/8-14                     | 24      | 12      | 10       | 43      | 61                            | <b>10-6F3MXS</b>     | <b>10-6F3MXSS</b>         | 315      | 315 |
| 14, 15, 16        | 5/8   | 3/4-14                 | 7/8-14                     | 27      | 12      | 12       | 50      | 117                           | <b>10-12F3MXS</b>    | <b>10-12F3MXSS</b>        | 160      | 160 |
| 18, 20            | 3/4   | 3/4-14                 | 1 1/16-12                  | 27      | 16      | 16       | 52      | 119                           | <b>12F3MXS</b>       | <b>12F3MXSS</b>           | 160      | 160 |
| 18, 20            | 3/4   | 1/2-14                 | 1 1/16-12                  | 27      | 16      | 14       | 52      | 100                           | <b>12-8F3MXS</b>     | <b>12-8F3MXSS</b>         | 315      | 315 |
| 18, 20            | 3/4   | 1-11                   | 1 1/16-12                  | 36      | 16      | 16       | 57      | 214                           | <b>12-16F3MXS</b>    | <b>12-16F3MXSS</b>        | 160      | 160 |
| 25                | 1     | 1-11                   | 1 5/16-12                  | 36      | 22      | 22       | 58      | 185                           | <b>16F3MXS</b>       | <b>16F3MXSS</b>           | 160      | 160 |
| 25                | 1     | 3/4-14                 | 1 5/16-12                  | 36      | 22      | 18       | 54      | 146                           | <b>16-12F3MXS</b>    | <b>16-12F3MXSS</b>        | 160      | 160 |
| 28, 30, 32        | 1 1/4 | 1 1/4-11               | 1 5/8-12                   | 46      | 28      | 28       | 62      | 309                           | <b>20F3MXS</b>       | <b>20F3MXSS</b>           | 160      | 160 |
| 28, 30, 32        | 1 1/4 | 1-11                   | 1 5/8-12                   | 46      | 28      | 24       | 61      | 243                           | <b>20-16F3MXS</b>    | <b>20-16F3MXSS</b>        | 160      | 160 |
| 35, 38            | 1 1/2 | 1 1/2-11               | 1 7/8-12                   | 50      | 33      | 33       | 68      | 421                           | <b>24F3MXS</b>       | <b>24F3MXSS</b>           | 160      | 140 |
| 35, 38            | 1 1/2 | 1 1/4-11               | 1 7/8-12                   | 50      | 33      | 32       | 67      | 352                           | <b>24-20F3MXS</b>    | <b>24-20F3MXSS</b>        | 160      | 140 |

Les produits sont conformes à notre gamme standard de livraison.

Les versions métriques et pouces peuvent avoir des 6 pans de dimension différente.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Les pressions nominales (PN) peuvent différer selon la matière: acier (S) et inox (SS).