LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

Diaphragm Piston





Non-Venting

Max Inlet: 414 bar (6,000 psi)

Max Outlet: 35 bar (510 psi)

Cv 0.06



INTRODUCING THE LF310...

The LF310 is a single-stage diaphragm-sensed pressure regulator for applications that require higher supply pressures in addition to an extended life cycle.

Based on the LF300, with its long-lasting Inconel® X750 diaphragm, the LF310 also offers a 'solid disk' seat design which is more robust for aggressive or high temperature applications.

SPECIFICATION

Max. Rated Inlet Pressure	414 bar (6,000 psi)
Outlet Ranges	Up to 35 bar (510 psi)
Design Proof Pressure	150% max. working pressure
Seat Leakage	In accordance with ANSI/FCI 70-3
Weight	0.9kg (2lbs)

STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Body and Bonnet	AISI 316 / 316L Stainless Steel (UNS S31600 / S31603)
Main Valve Pin	AISI 316 / 316L Stainless Steel (UNS S31600 / S31603)
Soft Seat	PEEK™ or PCTFE
Valve Spring	Inconel® X750
Diaphragm	Inconel® X750
Handwheel	Nylon
'O'-Ring Seals	FKM / FPM
Loading Spring	AISI 302 Stainless Steel (UNS S30200)
Filter	40 Microns

FEATURES AND BENEFITS

INCONEL® X750 DIAPHRAGM

> For ultimate strength and reliability on clean or corrosive applications.

316SS THREADED BONNET

> For panel mounting option as standard.

40 MICRON INLET **FILTER**

> First stage soft seat protection from system contamination.

SOLID DISK SEAT **DESIGN**

> Robust design enabling higher inlet pressures of up to 414 bar (6,000 psi).

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E info@pressure-tech.com

W www.pressure-tech.com

LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

• Diaphragm • Piston





Non-Venting


Max Inlet: 414 bar (6,000 psi)


Max Outlet: 35 bar (510 psi)


Cv 0.06

DRAWINGS AND INSTALLATION DIMENSIONS

Dimensions shown for 1/2" NPT option - please contact the office for additional connection options.

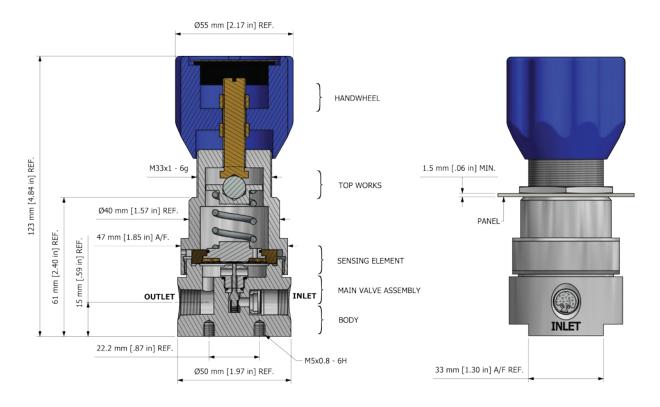





Note:

All gauge ports are 1/4" NPT as standard.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements





LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

• Diaphragm • Piston





Non-Venting

Max Inlet: 414 bar (6,000 psi)


Max Outlet: 35 bar (510 psi)

Cv 0.06

FLOW CURVE

Please contact the office for further information.

PORTING CONFIGURATIONS

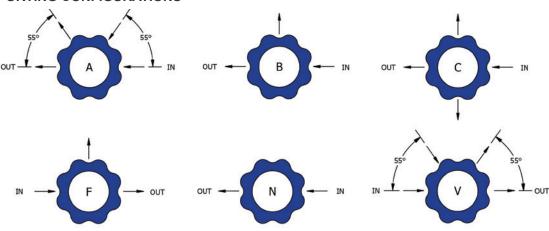

Note:

Additional porting configurations are available - please contact the office for further information.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

DiaphragmPiston



Non-Venting


Max Inlet: 414 bar (6,000 psi)

Max Outlet: 35 bar (510 psi)

Cv 0.06

ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

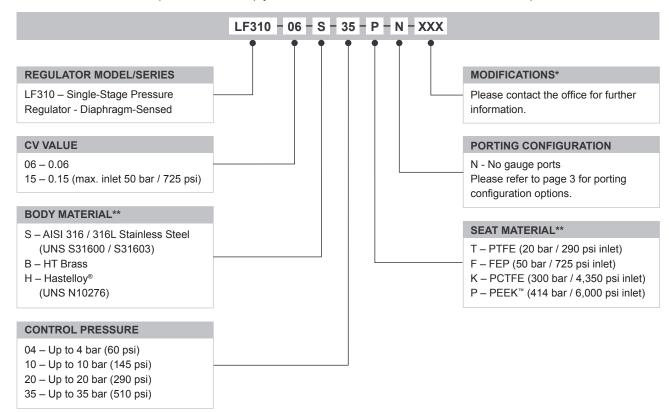

OPTIONAL EXTRAS PART NUMBER DESCRIPTION Service Kit SRK-LF310-06-U-K-M2-V PCTFE seat and FKM/FPM seals Service Kit SRK-LF310-06-U-P-M2-V PEEK™ seat and FKM/FPM seals PT-C-024 Panel Mounting Ring Note: Ancillary equipment and additional Service Kit options also available

TRADEMARKS: PEEK™ is a trademark of Victrex PLC

Inconel® is a registered trademark of Inco Alloys International Hastelloy® is a registered trademark of Haynes International, Inc.

- * Where applicable
- ** Other materials may be available please contact the office

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements





PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E info@pressure-tech.com

W www.pressure-tech.com

