

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A

B

C

D

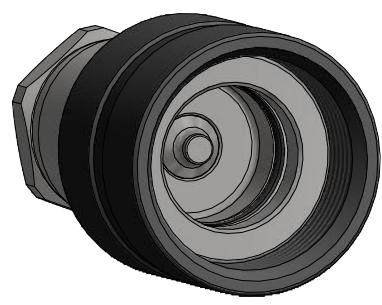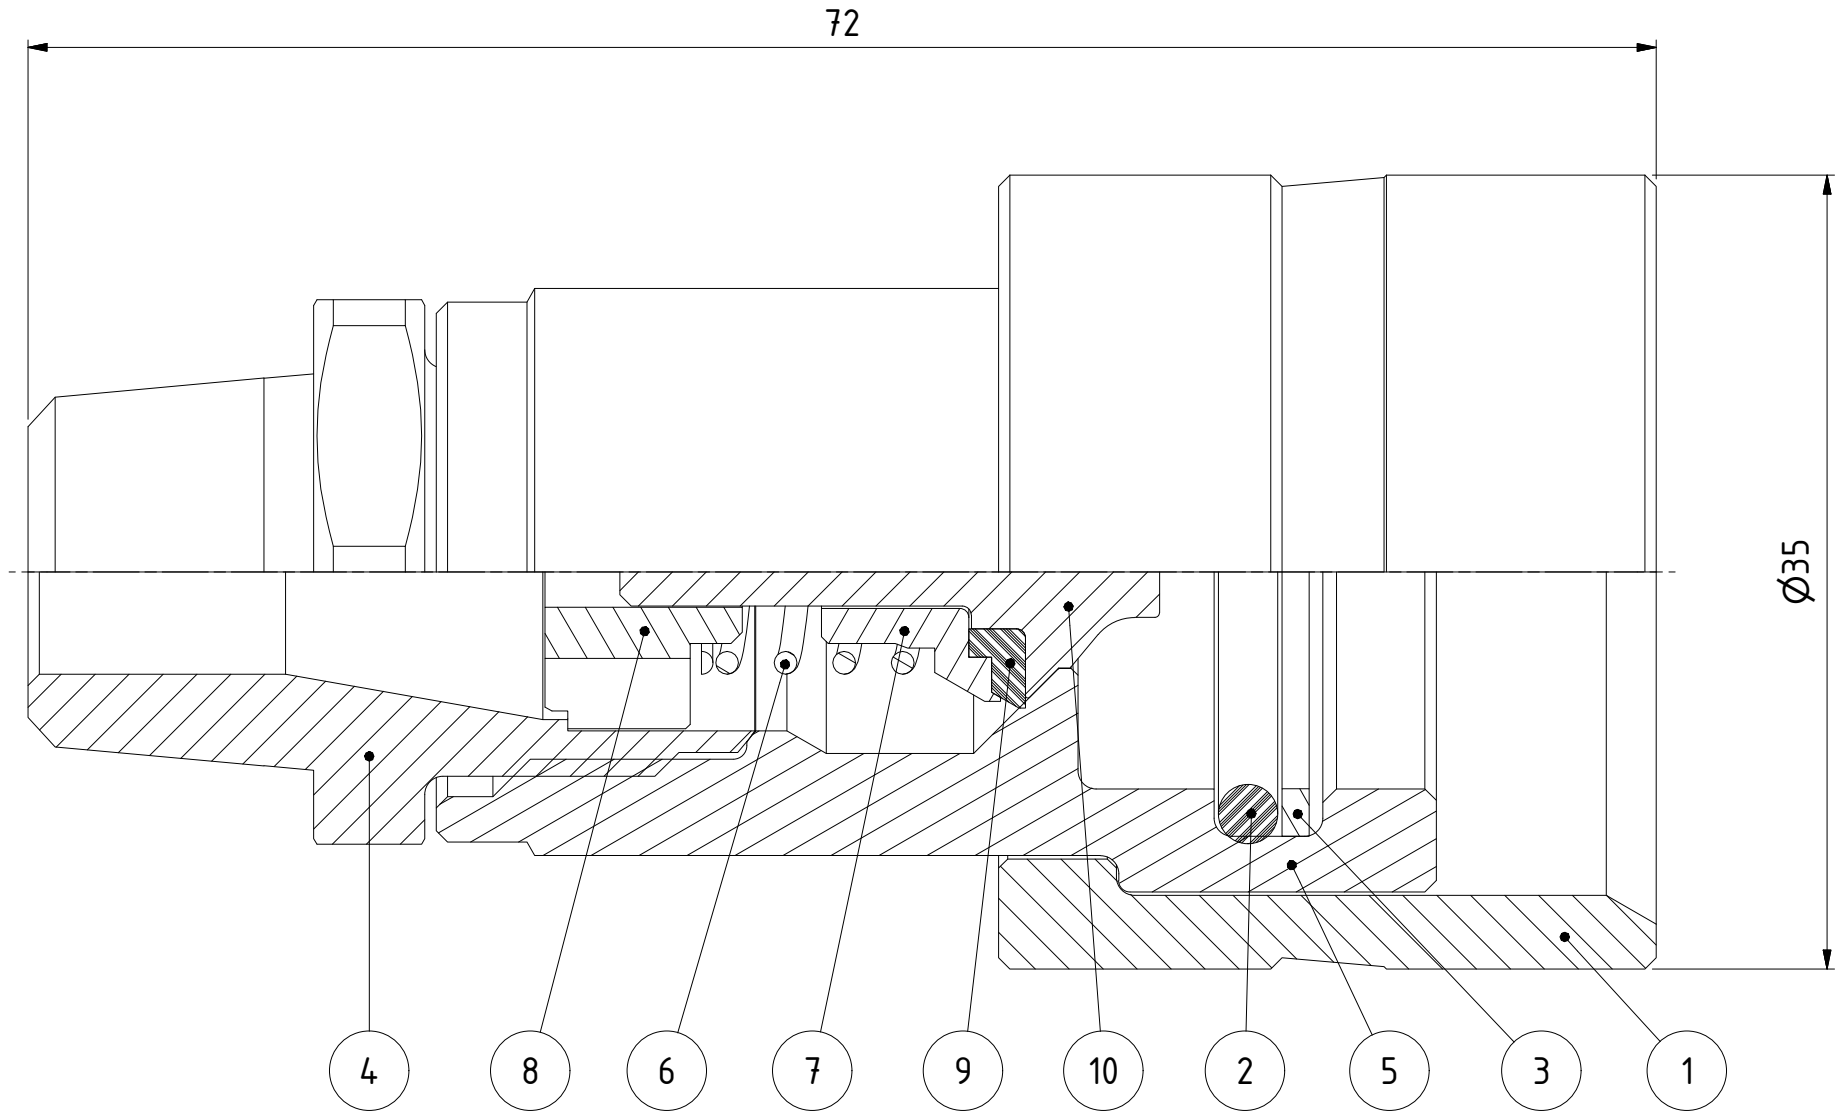

1 : 1

A

B

C

D

Compliant with ISO 14540

Product No. 102321494	
Nominal flow Ø DN:	10 mm
Connection Stroke:	16 mm
Max WP Connected:	720 bar
Max WP Disconnected:	720 bar
Min BP Connected:	2160 bar
Min BP Disconnected:	2160 bar
Temperature range:	-30°C - +100°C
Connection:	3/8" NPT Male
Sealing material:	NBR
Hexagon:	24

10	1	Valve	Steel, Zn 8 silver			
9	1	Sealing	PUR			
8	1	Stop for valve	Brass			
7	1	Valve seat	Steel, Zn 8 silver			
6	1	Spring	Stainless steel			
5	1	Coupling Body	Steel, Zn 8 silver			
4	1	Back Part	Steel, Zn 8 silver			
3	1	Back-up ring	PTFE			
2	1	O-ring	NBR			
1	1	Locking Sleeve	Steel, Zn 8 silver			
Item	Qty	Description	Material			
		Scale	Drawn	Checked	Appr.	ECO
		3 : 1	cabmro	AO	JE	
		Drawing No.				Date
		2018-07-03				
		Issue				Sheet
		AA				1 /(1)



Assembly Drawing 502321494