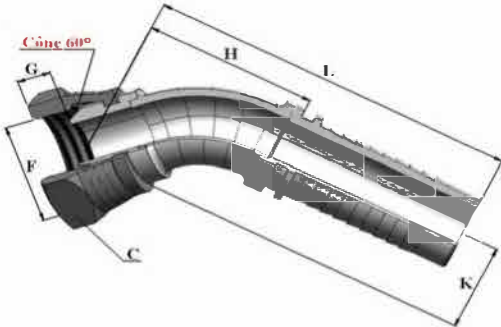
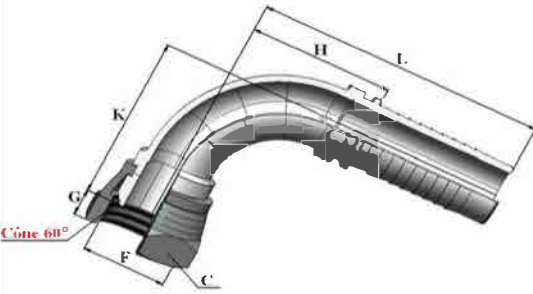


Embout Coudés à sertir Femelle BSP

Profils Embouts	DN		Filetages F	References	Dimensions (mm)				
	Inch	mm			C	H	L	K	G
EMBOUT Femelle Tournant BSP Coudé 45° - Cône 60° 	3/16"	5	1/8"	31 S472 0203	14				3,0
			1/8"	31 S472 0204	14				3,0
	1/4"	6	1/4"	31 S472 0404	19				5,0
			3/8"	31 S472 0604	22				7,0
	5/16"	8	1/4"	31 S472 0405	19				5,0
			3/8"	31 S472 0605	22				7,0
	3/8"	10	1/4"	31 S472 0406	19				5,0
			3/8"	31 S472 0606	22				7,0
			1/2"	31 S472 0806	27				7,0
	1/2"	13	3/8"	31 S472 0608	22				7,0
			1/2"	31 S472 0808	27				7,0
			5/8"	31 S472 1008	30				9,0
			3/4"	31 S472 1208	32				9,0
	5/8"	16	1/2"	31 S472 0810	27				7,0
			5/8"	31 S472 1010	30				9,0
			3/4"	31 S472 1210	32				9,0
	3/4"	20	1/2"	31 S472 0812	27				7,0
			3/4"	31 S472 1212	32				9,0
			1"	31 S472 1612	41				10,0
	1"	25	3/4"	31 S472 1216	32				9,0
			1"	31 S472 1616	41				10,0
	1"1/4	32	1"1/4	31 S472 2020	50				11,0
	1"1/2	38	1"1/2	31 S472 2424	55				11,0
	2"	50	2"	31 S472 3232	70				15,0
Profils Embouts	DN		Filetages F	References	Dimensions (mm)				
	Inch	mm			C	H	L	K	G
EMBOUT Femelle Tournant BSP Coudé 90° - Cône 60° 	3/16"	5	1/8"	31 S473 0203	14				3,0
			1/8"	31 S473 0204	14				3,0
	1/4"	6	1/4"	31 S473 0404	19				5,0
			3/8"	31 S473 0604	22				7,0
	5/16"	8	1/4"	31 S473 0405	19				5,0
			3/8"	31 S473 0604	22				7,0
			1/2"	31 S473 0805	27				7,0
	3/8"	10	1/4"	31 S473 0406	19				5,0
			3/8"	31 S473 0606	22				7,0
			1/2"	31 S473 0806	27				7,0
	1/2"	12	3/8"	31 S473 0608	22				7,0
			1/2"	31 S473 0808	27				7,0
			5/8"	31 S473 1008	30				9,0
			3/4"	31 S473 1208	32				9,0
	5/8"	16	1/2"	31 S473 0810	27				7,0
			5/8"	31 S473 1010	30				9,0
			3/4"	31 S473 1210	32				9,0
	3/4"	20	1/2"	31 S473 0812	27				7,0
			3/4"	31 S473 1212	32				9,0
			1"	31 S473 1612	41				10,0
	1"	25	3/4"	31 S473 1216	32				9,0
			1"	31 S473 1616	41				10,0
	1"1/4	32	1"1/4	31 S473 2020	50				11,0
	1"1/2	38	1"1/2	31 S473 2424	55				11,0
	2"	50	2"	31 S473 3232	70				15,0

La forme et la dimension des pièces sont données à titre indicatif, elles peuvent être modifiées sans preavis

En cour de test, Demande de validation BE