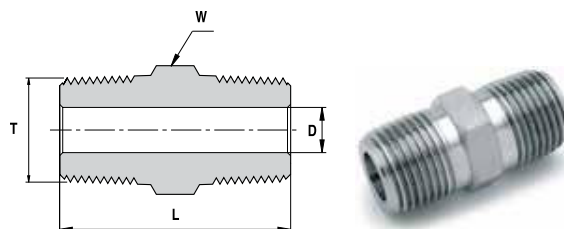
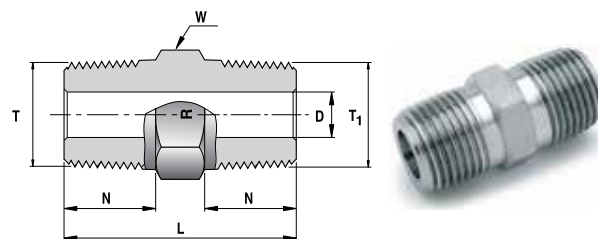


122 H**MAMELON HEXAGONAL**

Référence de commande	T Dimension mâle NPT	L		D Orifice minimum		W Plat
		pouce	mm	pouce	mm	pouce
122H _ 1/16	1/16	1.01	25.7	0.12	3.0	5/16
122H _ 1/8	1/8	1.01	25.7	0.19	4.8	7/16
122H _ 1/4	1/4	1.40	35.6	0.28	7.1	9/16
122H _ 3/8	3/8	1.43	36.3	0.38	9.6	11/16
122H _ 1/2	1/2	1.84	46.7	0.47	11.9	7/8
122H _ 3/4	3/4	1.84	46.7	0.62	15.8	1 1/16
122H _ 1	1	2.32	58.9	0.87	22.1	1 3/8

122 HNR**MAMELON HEXAGONAL NPT
GAZ CONIQUE (BSPT)**

Référence de commande	T Male NPT Size	T1 Dimension Male Gaz conique (BSPT -ISO 7/1-BS21)	L		N		D Orifice minimum		W Plat
			pouce	mm	pouce	mm	pouce	mm	pouce
122HNR _ 1/8	1/8	1/8-28	1.01	25.6	0.38	9.7	0.19	4.8	7/16
122HNR _ 1/4	1/4	1/4-19	1.40	35.6	0.56	14.2	0.28	7.1	9/16
122HNR _ 3/8	3/8	3/8-19	1.43	36.3	0.56	14.2	0.38	9.6	11/16
122HNR _ 1/2	1/2	1/2-14	1.84	46.7	0.75	19.0	0.47	11.9	7/8
122HNR _ 3/4	3/4	3/4-14	1.84	46.7	0.75	19.0	0.62	15.8	1 1/16
122HNR _ 1	1	1-11	2.32	58.9	0.94	23.9	0.87	22.1	1 3/8

La côte D est l'orifice minimum

Les dimensions sont indicatives , et sujettes à modification sans notices préalables .