
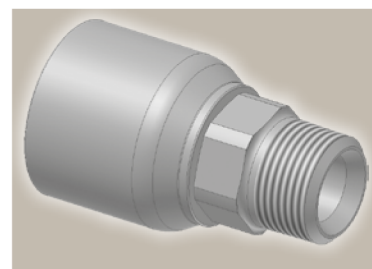


01 Mâle NPTF



SAE J476A / J516 – AGN



Référence	D. Int. du tuyau				Filetage NPTF	A mm	B mm	H mm
	DN	pouce	module	mm				
10170-6-6-SM	10	3/8	-6	9,5	3/8-18	60	31	19
10170-12-8-SM	12	1/2	-8	12,7	3/4-14	68	33	27
10170-8-10-SM	16	5/8	-10	15,9	1/2-14	75	38	24
10170-12-10-SM	16	5/8	-10	15,9	3/4-14	71	34	27
10170-12-12-SM	19	3/4	-12	19,1	3/4-14	79	39	27
10170-16-12-SM	19	3/4	-12	19,1	1-11 1/2	79	39	36
10170-16-16-SM	25	1	-16	25,4	1-11 1/2	93	46	36

03 Mâle JIC 37°

ISO12151-5-S – AGJ

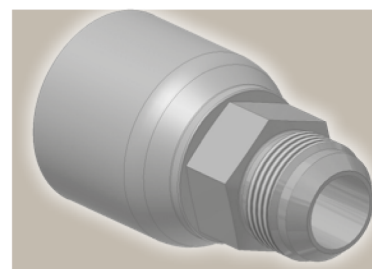

Référence	D. Int. du tuyau				Filetage UNF	A mm	B mm	H mm
	DN	pouce	module	mm				
10370-6-6-SM	10	3/8	-6	9,5	9/16x18	60	31	19
10370-8-6-SM	10	3/8	-6	9,5	3/4x16	59	29	19
10370-8-8-SM	12	1/2	-8	12,7	3/4x16	68	33	22
10370-10-8-SM	12	1/2	-8	12,7	7/8x14	67	32	24
10370-12-8-SM	12	1/2	-8	12,7	1 1/16x12	71	36	27
10370-10-10-SM	16	5/8	-10	15,9	7/8x14	75	38	24
10370-12-10-SM	16	5/8	-10	15,9	1 1/16x12	75	36	27
10370-12-12-SM	19	3/4	-12	19,1	1 1/16x12	82	42	27
10370-16-12-SM	19	3/4	-12	19,1	1 5/16x12	77	38	36
10370-16-16-SM	25	1	-16	25,4	1 5/16x12	94	47	36

Série d'embouts compatible avec les tuyaux, en fonction des modules:

70 371LT 372 372RH 372TC 701 701 TC F42-8 SX35